


# Angle Valve With Filter

# KAS®



## PRODUCT CODE

Size	DN	D	D2	AA	L	H
175	7,5	1/2"	3/8"	16	63,4	53,4

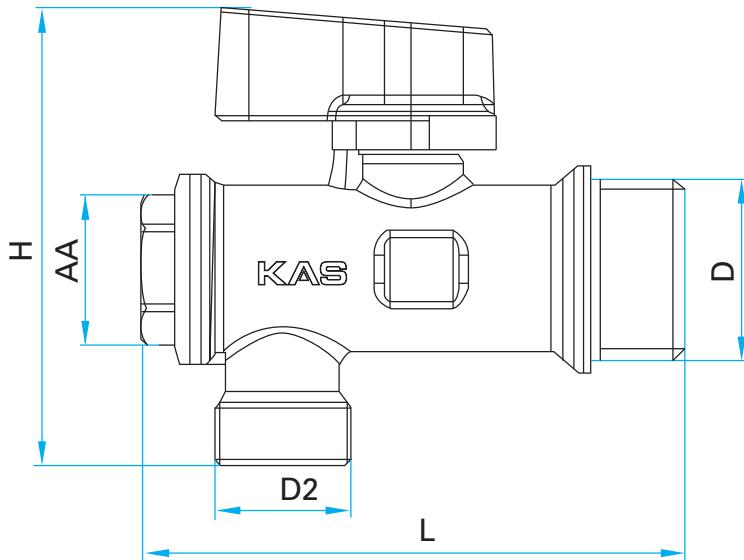

## TECHNICAL DATA SHEET

Product Name	Angle Valve With Filter
Standard	-----
Operating Temperature	-10°C / +65°C
Usage Area	Water Plumping
Operating Pressure	PN 10 (10 bar)
Max. Operating Pressure	PN 10 (10 bar)

## MATERIAL SPECT

Body	BRASS (CW617N) TS EN 12165
Ball Teflon	PTFE (TEFLON)
Mill	BRASS (CW614N) TS EN 12164
Mill O-Ring	NBR (ORING)
Ball	BRASS (CW617N) TS EN 12165
Handle	PRC

The Ball is manufactured from brass material (CW617N)

## SURFACE SPECTS (PLATING)

Body	NICKEL (5-10 µm)
Mill	-----
Ball	NICKEL (5-10 µm) + KROM (0.3 µm)
Handle	PLASTIC

## ASSEMBLY AND USAGE INSTRUCTIONS

- 1- Make sure there is no damage on the product may accure during transport and shipping. Before assembly unpack the product in order to preventfrom the side effects.
- 2- Clean all kinds of contaminants before assembly.
- 3- Make sure about the thread size to meet the installation thread size.
- 4- Keep the valve closed position during the installation and use proper tool.
- 5- Use enough flax or plumping adhesive.
- 6- Use the valve full open or full closed
- 7- Do not paint the product , do not expose to chemicals , do not open or colose with a tool and do not remove the handle.