


Garden Bibcock

KAS®

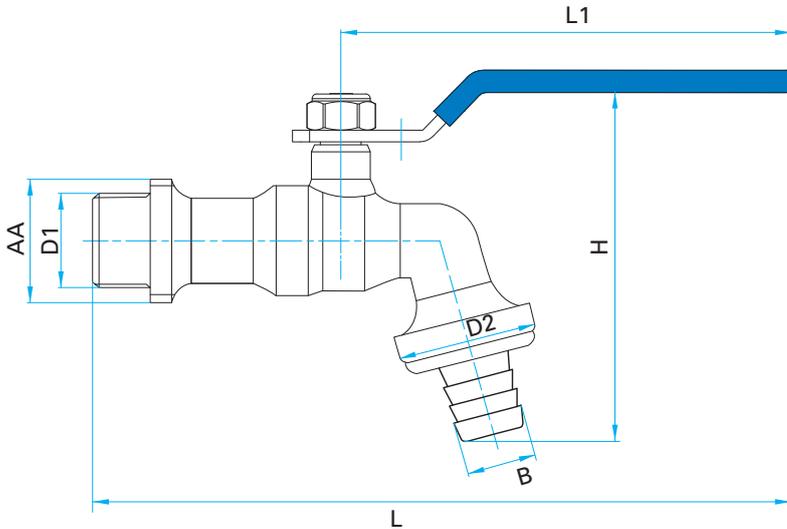

TECHNICAL DATA SHEET

Product Name	Garden Bibcock
Working Temperature	-10°C / +80°C
Pressure Class	PN 25
Intended use	Water Supply Systems
Connections	Suitable for Hose etc.

DIMENSIONS

Code	06.921	03.922
D1	1/2"	3/4"
D2	3/4"	3/4"
AA	24	30
B	14.5	20.8
L	147	147
L1	95	95

Dimensions are in "millimeter"

MATERIALS

Body	Brass
Body Cover	Brass
Ball	Brass
Spindle	Brass
Handle	Steel
Handle Nut	Steel
Hose Connector	Brass
Ball Seal	PTFE
Spindle Seal	2 x O-ring-Rubber NBR

SURFACES FINISH

Body	Nickel-plated
Body Cover	Nickel-plated
Ball	Nickel+Chrome-plated
Spindle	Nickel-plated
Handle	Zinc-Plated, Covered by blue PVC

INSTALLATION and OPERATING INSTRUCTION

- 1- Be careful about not to damage product while transporting and shipping. Before mounting, do not open the packet of product due to prevent the any impurities to enter the product.
- 2- Before mounting, make the system clean for any impurities
- 3- Be careful that the length of thread to be fixed to Garden bibcock, must not be too much longer or too much shorter than thread length of Garden bibcock.
- 4- While mounting, Grip the Garden bibcock with suitable wrench at the octagonal side.
- 5- Follow the arrow on the Lever while opening or closing. From opening to closing turn is quarter (90°)
- 6- Do not dye, not make Garden bibcock contact with corrosive, abrasive materials, not use any other tool for opening or closing except its own lever, not unfix lever.