

Coated Extensible Conn. Hoses 1/2" Nut-1/2" Nipple (F/M)

KAS®



TECHNICAL DATA SHEET


Product Name	Coated Extensible Conn. Hoses 1/2" Nut-1/2" Nipple (F/M)
Working Pressure	Max. 0,5 Bar
Intended Use	Gas Installation

MATERIAL

Hose	AISI 304L
Nipple	AISI 303
Tube	AISI 303
Nut	Brass
Cover	Polyolefin
Gasket	NBR

SURFACE

Nut	Nickel Plated
Cover	Yellow

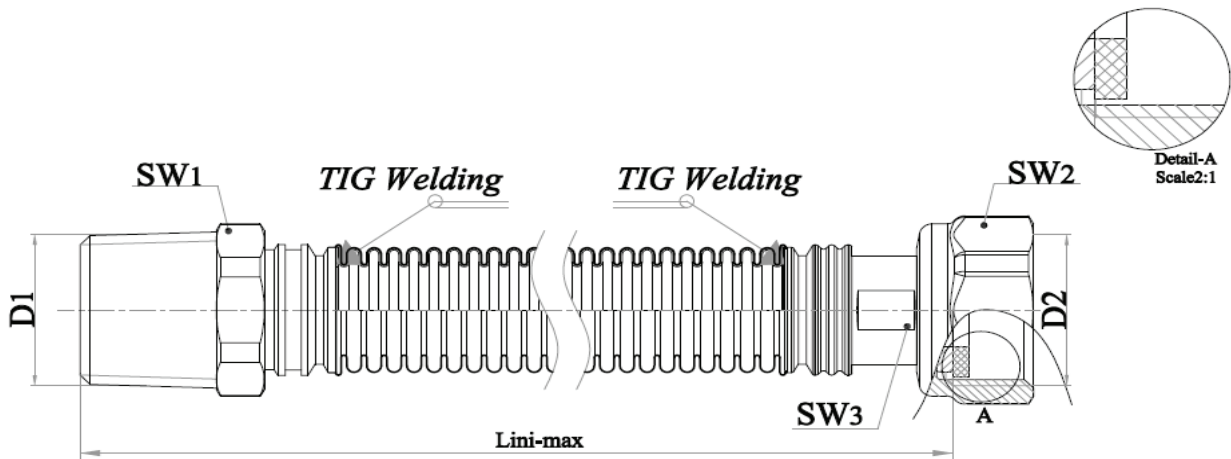

Dimensions are in "millimeter"

PRODUCT

CODE	DN	D1(inch)	D2(inch)	SW1(mm)	SW2(mm)	SW3(mm)	Lini-max(cm)
30.11.021	12	R 1/2"	G 1/2"	22	24	14	10-20



**Coated Extensible Conn.
Hoses 1/2" Nut-1/2"
Nipple (F/M)**

KAS[®]

- 1- This product is a flex hose assembly dedicated for use of water connection.**
- 2- The failure / damage of any single part of the product results in the requirement of complete renewal / change of the product.**
- 3- This product consists of a flexible hose, nut, tube, cover and gasket.**
- 4- Operating pressure is according to 0,5 bar.**
- 5- This product can be used with Gas.**
- 6- Check the length of the product and the appropriateness of the fittings before installation.**
- 7- During the installation, sealing materials that are suitable for water can be used.**
- 8- Be sure that a sealing element is readily available in the package.**
- 9- Be sure that the sealing element is intact and has no deformation or damage on it.**
- 10- Via testing, be sure that there is no water leakage after the product is installed in place.**
- 11- If the sealing element is not intact, meaning damaged, deformed etc., change it with new.**
- 12- Hose assembly MUST be installed without any twisting, and within a free and reachable place.**