

Angle Pex-B Radiator Valve

KAS[®]




TECHNICAL DATA SHEET


Product Name	Angle Pex-B Radiator Valve
Standard	TS 579
Working Temperature	120°C
Pressure Class	PN 10
Intended Use	Heating Systems

DIMENSIONS

Code	04.01.309
DN	15
D1 (thread)	Rp 1/2"
D2 (thread)	G 1/2"
L1 (max-min)	81,7 - 89,7
L2	52,2
ø	9
SW1	30
SW2	24

Dimensions are in "milimeter"

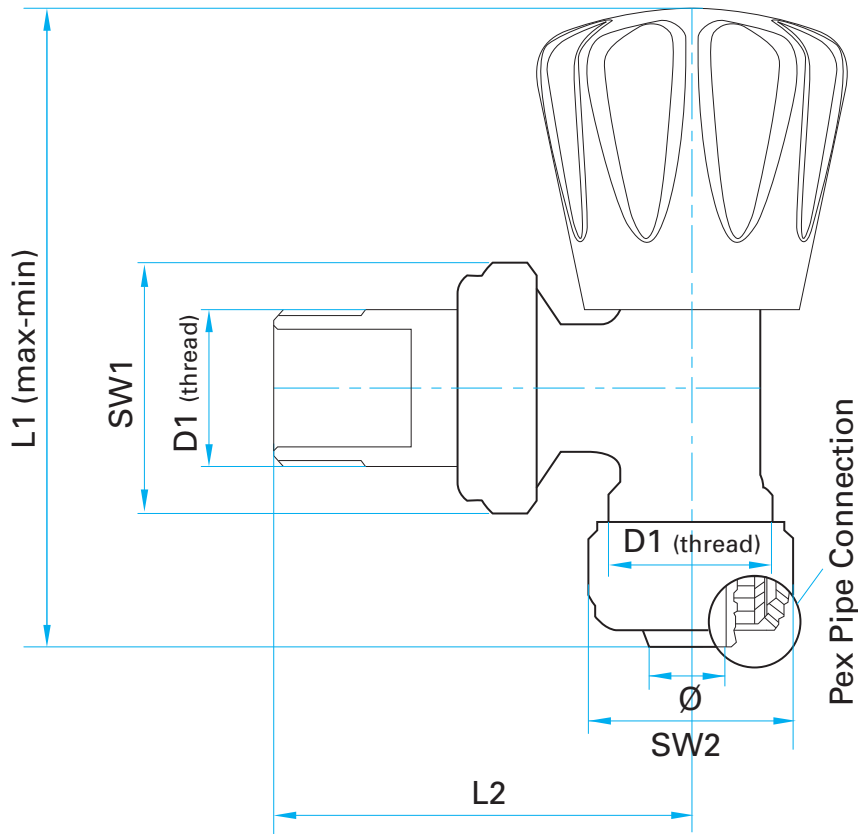



Angle Pex-B Radiator Valve



MATERIALS

Body	Brass (CW617N) / (CW614N)
Spindle	Brass (CW617N) / (CW614N)
Nuts	Brass (CW617N) / (CW614N)
Tube	Brass (CW617N) / (CW614N)
Pex Connection	Brass (CW617N) / (CW614N)
Handle	ABS
Seals	NBR / EPDM

SURFACES FINISH

Body	Nickel - plated
Nuts	Nickel - plated
Tube	Nickel - plated

INSTALLATION and OPERATING INSTRUCTION

- 1- Make sure there is no damage on the product may occur during transport and shipping. Before assembly do not unpack the product in order to prevent from the external effects.
- 2- Clean all kinds of contaminants before assembly.
- 3- Make sure that the thread length to be connected to the valve is not too short or too long than the thread length of the valve.
- 4- Keep the valve in closed position during installation. Install the valve with the appropriate tool from the side where you'll mount it.
- 5- **Use enough flax or plumping adhesive.**
- 6- While opening and closing the valve, follow the arrows on the handle.
- 7- Do not paint the valve, do not expose the valve with abrasive chemicals.
- 8- Do not open or close with any other tool and do not remove the handle.